

## City of Platteville – Camp St Public Meeting

July 7<sup>th</sup>, 2025





# Agenda

- Project Contacts
- Project Overview
- Schedule
- Parking and Access
- Q&A

### **Project Contacts**

#### Josh Vollmer, PE

WisDOT Project Engineer

<u>Josh.Vollmer@klengineering.com</u>
(608) 316-0643

#### **Tim Kaniz**

Superintendent – Parisi <a href="mailto:tkaniz@walbecgroup.com">tkaniz@walbecgroup.com</a> (608) 358-3923

#### **Alex Wolfe**

Project Manager – Parisi <u>awolfe@walbecgroup.com</u> (608) 669-3938

#### Josh Nelson, PE

Project Manager – WisDOT Joshua.nelson@dot.wi.gov (608) 246-2857

#### **Parisi Office**


508 S. Nine Mound Road Verona, WI 53593 (608) 848-5991





## Project Overview

- Project Limits: Camp Street from Lancaster to Elm St
- New Storm Sewer
  - 1,032 LF RCP Pipe
  - 17 Storm Water Inlets
- Remove and Replace
  - Concrete Sidewalk (4' wide current to 5' wide new)
  - Concrete Curb & Gutter
  - Concrete Driveway Aprons
  - Asphalt Roadway



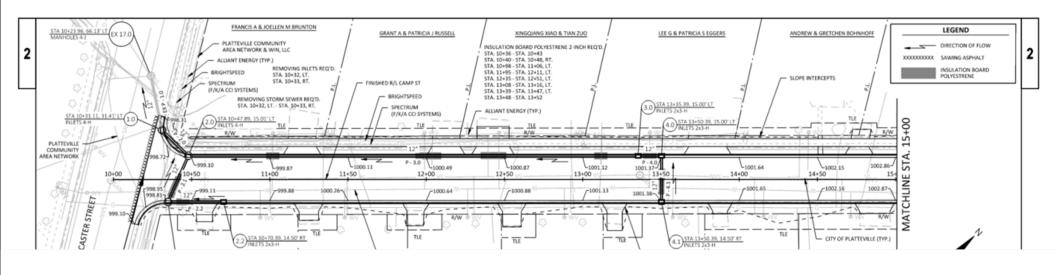

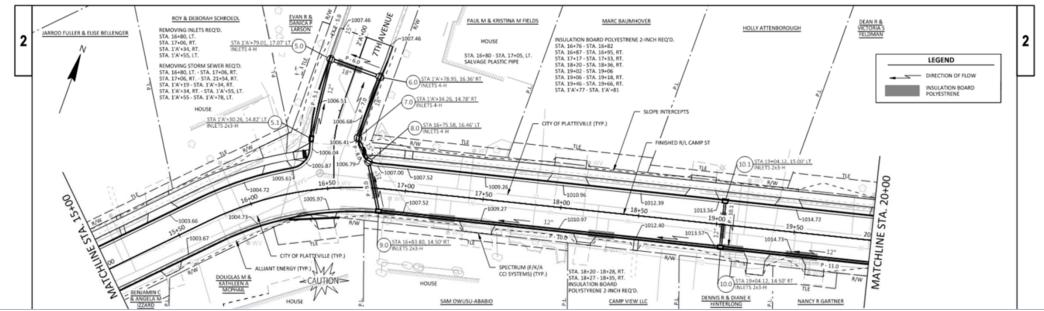

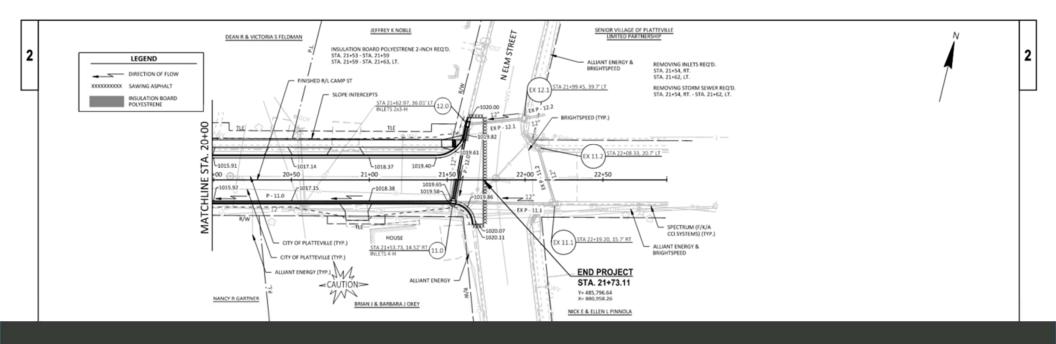



# Project Schedule

- Construction to begin week of July 14<sup>th</sup>.
- Project to be completed by September 30<sup>th</sup>.
- Project Sequence
  - Storm Sewer Installation (7/14 to 7/31)
  - Remove Existing Sidewalk, Curb & Gutter, Asphalt (7/28 to 8/8)
  - Rebuild Road Base and Sidewalk Base (8/11 to 8/15)
  - Pour New Sidewalk, Curb & Gutter, and Driveway Aprons (8/18 to 8/29)
  - Asphalt Paving, Rebuilding Terrace, Pavement Markings and Sign Installation (9/1 to 9/30)



# Parking and Access

- Road Closed to Through Traffic
- Starting Monday July 14<sup>th</sup> NO Street Parking
  - No street parking will continue until concrete is poured, then ONLY street parking until
    concrete is cured and you can get back into driveway, then back to NO street parking
- Garbage collection will not be changed, weekly on Tuesday
- We will give you a minimum 48 hours notice before restricting access to your driveway
- Temporary sidewalk matting will be installed on the north side of the current sidewalk



